


PROVIDING COMPREHENSIVE WATER SUPPLY SCHEME TO SURAPATTU, KATHIRVEDU, PUTHAGARAM & PUZHAL IN CHENNAI CITY

- Puzhal, Surapattu, Puthagaram & Kathirvedu are among the 42 local bodies added in the expanded area of Chennai city which falls in New Corporation Divisions of 22, 23, 24 & 25 in Area III (Madhavaram) to an extent of 22.89 Sq.Kms with 492 streets for a total length of about 166 Kms. Extension of old Chennai city by adding 42 local bodies necessitates the provision of a comprehensive water supply scheme to Puzhal, Surapattu, Puthagaram and Kathirvedu.
- The population to be benefited by implementing the scheme is 68582, 115017 & 193238 for the year 2014, 2029 and year 2044 respectively at the rate of water demand of 10.54 MLD, 17.71MLD & 29.77 MLD for the corresponding years.
- The scheme cost for providing comprehensive water supply scheme to Puzhal, Surapattu, Puthagaram & Kathirvedu in Chennai city is Rs. 8261.00 Lakhs. The total project cost of water supply and sewerage scheme posed under CMCDM funds for year 2013 - 14 is Rs. 51333.00 Lakhs.
- The Govt. in its G.O.Ms. No. 105, MA&WS (MC.I) Dept. Dt.11.07.2013 has issued orders for the implementation of Chennai Mega City Development MissionFund.

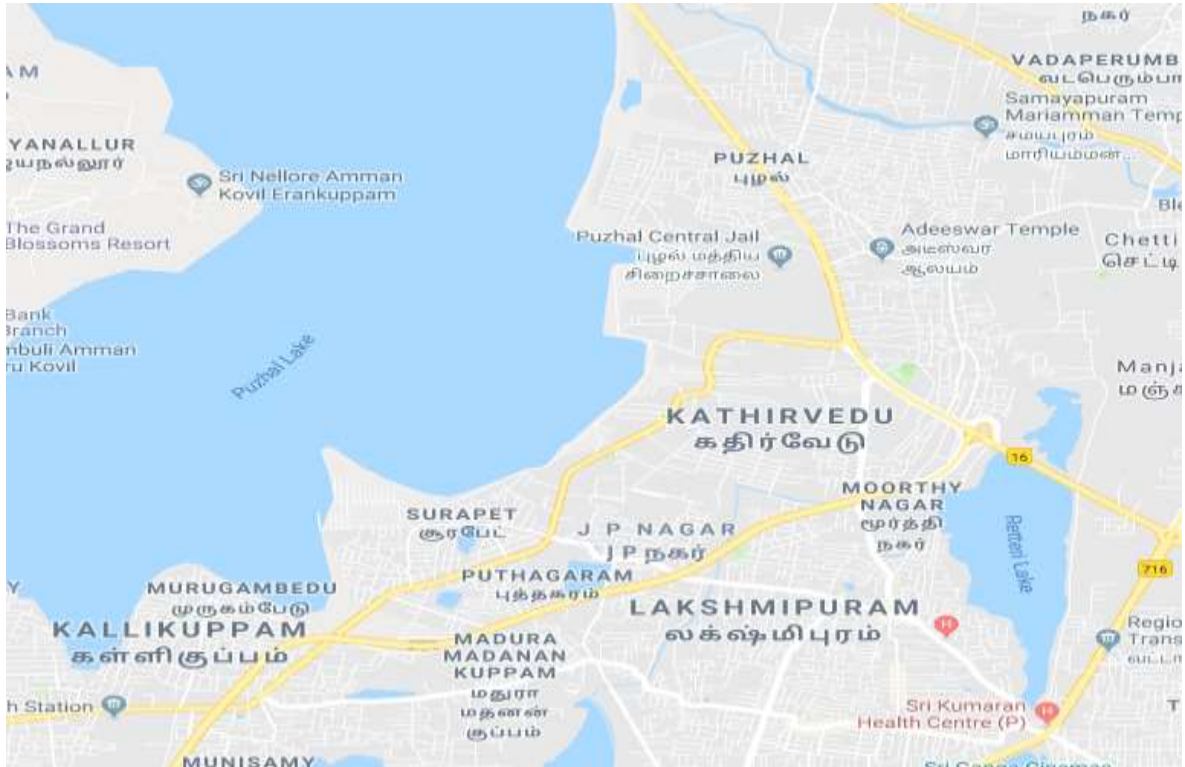

➤ **Scheme components:**

1. Laying of DI distribution mains of sizes ranging from 100mm to 800mm dia for a length of 166701m.
2. Laying of conveying / pumping mains of sizes 200mm dia, 250mm dia & 600mm dia DI pipes for a length of 6347m.
3. Construction of OHT of 50 LL capacity, UGT of 8 LL capacity with pump house at Puzhal.
4. Construction of OHT of 7LL capacity & UGT of 1 LL capacity with pump house at KS Nagar.
5. Providing House Service Connections 10680 nos.

➤ **Contract details:**

The work has been awarded to M/s. Aqua Designs India Pvt. Ltd. in consortium with M/s. Velagapudi Ramarao, Chennai for the contract value of Rs. 5912.51 Lakhs on 26.06.2014 with contract period of 24 months. The work commenced on 18.07.2014 and which is under progress.

➤ **Progress of Work (as on 30.04.2018)**

1. Physical progress - 86.58%
2. Financial progress - 72.81%
3. Probable date of completion - 31.07.2018.